


# RUBBERWORX

## BLUE PVC DISCHARGE

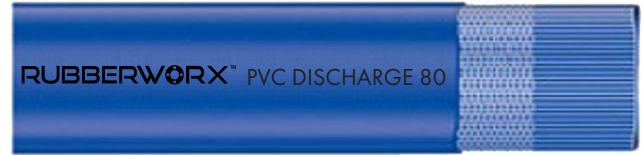

This light-duty PVC water discharge hose is designed for use in construction, dewatering, agricultural and industrial applications. PVC tube and cover are designed to handle residual chemicals in water transfer applications.

<b>TUBE:</b>	PVC
<b>REINFORCEMENT:</b>	TEXTILE BRAID
<b>COVER:</b>	BLUE PVC
<b>TEMPERATURE:</b>	-5°F to 170°F
<b>BRANDING:</b>	PVC DISCHARGE 80 PSI
<b>PACKAGING SPECIFICATIONS:</b>	300' COILS, 100' AND 50' SECTIONS

SA #	ID (IN)	OD (IN)	WP (PSI)	BURST (PSI)	BEND RADIUS (IN)	VACUUM RATING (HG)	WEIGHT	PACKAGING
1009123-075	0.75	0.89	140	425	NA	NA	0.08	50', 100', 300'
1009123-100	1.00	1.15	110	340	NA	NA	0.10	50', 100', 300'
1009123-125	1.25	1.36	80	255	NA	NA	0.14	50', 100', 300'
1009123-150	1.50	1.73	80	240	NA	NA	0.19	50', 100', 300'
1009123-200	2.00	2.21	80	240	NA	NA	0.24	50', 100', 300'
1009123-250	2.50	2.68	65	200	NA	NA	0.30	50', 100', 300'
1009123-300	3.00	3.20	80	240	NA	NA	0.36	50', 100', 300'
1009123-400	4.00	4.26	70	210	NA	NA	0.53	50', 100', 300'
1009123-500	5.00	5.21	40	130	NA	NA	0.63	50', 100', 300'
1009123-600	6.00	6.31	60	200	NA	NA	0.86	50', 100', 300'
1009123-800	8.00	8.32	35	100	NA	NA	1.30	50', 100', 300'
1009123-1000	10.00	10.42	35	100	NA	NA	1.88	50', 100', 300'
1009123-1200	12.00	12.37	35	100	NA	NA	2.43	50', 100', 300'