


RUBBERWORX

GENERAL CHEMICAL COMPOSITE

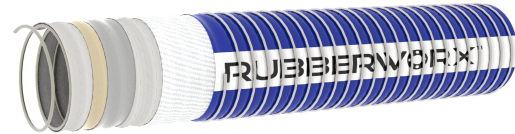

This heavy-duty suction and discharge composite hose is designed for use in general chemical transfer applications. The flexible design is perfect for tank farms, midstream pumping locations, loading stations, and loading arm hoses. In applications where bend radius and weight are an issue with rubber, chemical composite is the perfect solution.

INNER HELIX:	POLY COATED STEEL
TUBE:	POLYPROPYLENE FILM
REINFORCEMENT:	POLYPROPYLENE FABRIC POLYETHYLENE FILM REINFORCEMENT
COVER:	POLYVINYL COATED SYTHETIC FABRIC
OUTER HELIX:	GALVANIZED STEEL
TEMPERATURE:	-40°F to 212°F
BRANDING:	4" CHEMICAL COMPOSITE 250 PSI PG
PACKAGING SPECIFICATIONS:	100' COILS AND 5' INCREMENT LENGTHS

SA #	ID (IN)	WP (PSI)	BURST (PSI)	BEND RADIUS (IN)	VACUUM RATING (HG)	WEIGHT	PACKAGING
8C01205-100	1.00	250	1000	4.0	29	0.61	10', 20', 25', 30'
8C01205-125	1.25	250	1000	5.0	29	0.85	10', 20', 25', 30'
8C01205-150	1.50	250	1000	5.5	29	1.00	10', 20', 25', 30'
8C01205-200	2.00	250	1000	7.0	29	1.46	10', 20', 25', 30'
8C01205-250	2.50	250	1000	8.7	29	2.08	10', 20', 25', 30'
8C01205-300	3.00	250	1000	11	29	2.47	10', 20', 25', 30'
8C01205-400	4.00	250	1000	16	29	3.55	10', 20', 25', 30'
8C01205-500	5.00	250	1000	19	29	4.87	10', 20', 25', 30'
8C01205-600	6.00	250	1000	23	29	8.00	10', 20', 25', 30'
8C01205-800	8.00	250	1000	32	29	10.65	10', 20', 25', 30'
8C01205-1000	10.00	250	1000	40	29	10.83	10', 20', 25', 30'
8C01205-1200	12.00	250	1000	48	29	15.15	10', 20', 25', 30'